


## RSZK90

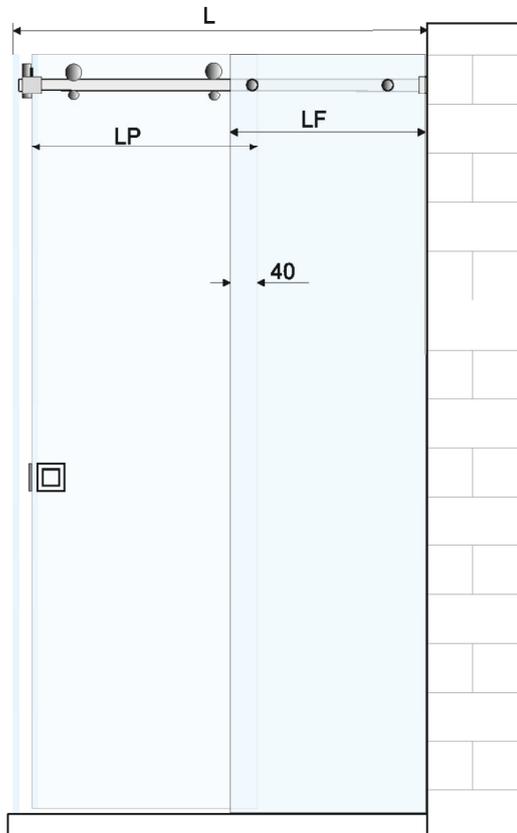

**Dimensionamento dei vetri per kit RSK90 (box doccia ad angolo) calcolato per spessore 8mm.**

Larghezza cabina (L) = 800-1000 mm  
Larghezza fisso (LF) = L-36mm/2  
Larghezza porta (LP) = LF + 40 mm

Consigliamo la molatura delle ante con bisello a 45°.  
Suggeriamo l'uso della guarnizione adesiva a palloncino AS02R (disponibile a parte) su uno dei bordi anta che vanno a combaciare. In questo caso ridurre:

- LP di 2 mm per ciascuna anta in caso di molatura a 45°
- LP di 4mm una sola delle ante in caso di molatura a filo lucido.

MD system per la guida, il fissaggio e la finitura del bordo inferiore della cabina è disponibili a parte  
Maniglia consigliata: GRH03

•Disponibili per il montaggio del vetro fisso: canaline SP03, IC02 e ICS02

**Glass sizing for RSK90 set (corner shower room set) calculated on 8 mm glass thickness**

Box width (L) = 800-1000 mm  
Fixed glass width (LF) = L-36mm/2  
Door width (LP) = LF + 40 mm

Recommended 45° glass door edge bevelling

Suggested to apply AS02R adhesive ball seal (available extra) on one mating edge of the glass door. In these cases, reduce:

- LP size of 2 mm in each glass door for 45° bevelling
- LP size of 4 mm in one glass door for polished straight line edging

MD system, used to drive the door and to finish the lower edge of the room, is available separately  
Suggested handles: GRH03

•Available for side glass fastening: SP03, IC02 and ICS02 «U» channels

